
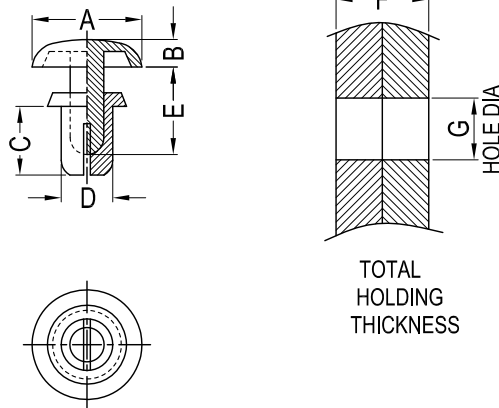


| REV | DESCRIPTION             | DATE      | CHECK |
|-----|-------------------------|-----------|-------|
| A1  | Change Extraction Force | 2016-2-27 | FDL   |



Notes:  
RoHS Compliant.

| Material: PA6 UL94 V2<br>Color: Black / White |             | Material: PA66 UL94 V0<br>Color: Black |             | Hole Dia.<br>G                    | Extraction<br>Force<br>Kgf(Min.) | F         | A                                                                                     | B          | C         | D         | E   |           |  |  |  |
|-----------------------------------------------|-------------|----------------------------------------|-------------|-----------------------------------|----------------------------------|-----------|---------------------------------------------------------------------------------------|------------|-----------|-----------|-----|-----------|--|--|--|
| Part No.                                      | Article No. | Part No.                               | Article No. |                                   |                                  |           |                                                                                       |            |           |           |     |           |  |  |  |
| 20000/20002                                   | GR2024B/W   | 20001                                  | GR2024BV0   | Ø2.1 <sup>+0.1</sup> <sub>0</sub> | 3.0                              | 0.6-1.2   | 4.2                                                                                   | 1.2        | 2.4       | 2.0       | 2.8 |           |  |  |  |
| 20004/20006                                   | GR2032B/W   | 20005                                  | GR2032BV0   |                                   |                                  | 1.3-2.0   |                                                                                       |            | 3.2       |           | 3.8 |           |  |  |  |
| 20008/20010                                   | GR2040B/W   | 20009                                  | GR2040BV0   |                                   |                                  | 2.1-2.8   |                                                                                       |            | 4.0       |           | 5.5 |           |  |  |  |
| 20012/20014                                   | GR2048B/W   | 20013                                  | GR2048BV0   |                                   |                                  | 2.9-3.6   |                                                                                       |            | 4.8       |           | 5.5 |           |  |  |  |
| 20016/20018                                   | GR2056B/W   | 20017                                  | GR2056BV0   |                                   |                                  | 3.7-4.4   |                                                                                       |            | 5.6       |           | 7.2 |           |  |  |  |
| 20020/20022                                   | GR2064B/W   | 20021                                  | GR2064BV0   |                                   |                                  | 4.4-5.2   |                                                                                       |            | 6.4       |           |     |           |  |  |  |
| 20024/20026                                   | GR2632B/W   | 20025                                  | GR2632BV0   | Ø2.7 <sup>+0.1</sup> <sub>0</sub> | 3.0                              | 1.0-2.0   | 5.0                                                                                   | 1.4        | 3.2       | 2.6       | 4.6 |           |  |  |  |
| 20032/20034                                   | GR2642B/W   | 20033                                  | GR2642BV0   |                                   |                                  | 2.0-3.0   |                                                                                       |            | 4.2       |           |     |           |  |  |  |
| 20037/20039                                   | GR2648B/W   | 20038                                  | GR2648BV0   |                                   |                                  | 2.7-3.6   |                                                                                       |            | 4.8       |           | 6.2 |           |  |  |  |
| 20041/20043                                   | GR2655B/W   | 20042                                  | GR2655BV0   |                                   |                                  | 3.4-4.3   |                                                                                       |            | 5.5       |           |     |           |  |  |  |
| 20045/20047                                   | GR2664B/W   | 20046                                  | GR2664BV0   |                                   |                                  | 4.3-5.2   |                                                                                       |            | 6.4       |           | 7.8 |           |  |  |  |
| 20049/20051                                   | GR2672B/W   | 20050                                  | GR2672BV0   |                                   |                                  | 5.1-6.0   |                                                                                       |            | 7.2       |           | 7.8 |           |  |  |  |
| 20053/20055                                   | GR3035B/W   | 20054                                  | GR3035BV0   | Ø3.1 <sup>+0.1</sup> <sub>0</sub> | 7.0                              | 1.0-2.0   | 6.4                                                                                   | 1.6        | 3.5       | 3.0       | 5.1 |           |  |  |  |
| 20058/20060                                   | GR3045B/W   | 20059                                  | GR3045BV0   |                                   |                                  | 2.0-3.0   |                                                                                       |            | 4.5       |           | 6.1 |           |  |  |  |
| 20916/20915                                   | GR3050B/W   | 20917                                  | GR3050BV0   |                                   |                                  | 2.5-3.5   |                                                                                       |            | 5.0       |           |     |           |  |  |  |
| 20067/20069                                   | GR3055B/W   | 20068                                  | GR3055BV0   |                                   |                                  | 3.0-4.0   |                                                                                       |            | 5.5       |           | 7.1 |           |  |  |  |
| 20071/20073                                   | GR3065B/W   | 20072                                  | GR3065BV0   |                                   |                                  | 4.0-5.0   |                                                                                       |            | 6.5       |           |     |           |  |  |  |
| 20079/20081                                   | GR3075B/W   | 20080                                  | GR3075BV0   |                                   |                                  | 5.0-6.0   |                                                                                       |            | 7.5       | 9.0       |     |           |  |  |  |
| 20092/20094                                   | GR3080B/W   | 20093                                  | GR3080BV0   |                                   |                                  | 5.5-6.5   |                                                                                       |            | 8.0       |           |     |           |  |  |  |
| 20100/20102                                   | GR3090B/W   | 20101                                  | GR3090BV0   |                                   |                                  | 6.5-7.5   |                                                                                       |            | 9.0       | 11.0      |     |           |  |  |  |
| 20104/20106                                   | GR3100B/W   | 20105                                  | GR3100BV0   |                                   |                                  | 7.5-8.5   |                                                                                       |            | 10.0      |           |     |           |  |  |  |
| 20108/20726                                   | GR3145B/W   | 20748                                  | GR3145BV0   |                                   |                                  | 11.5-13.0 |                                                                                       |            | 14.5      | 15.5      |     |           |  |  |  |
| 20109/20111                                   | GR3230B/W   | 20110                                  | GR3230BV0   |                                   |                                  | 20.5-21.5 |                                                                                       |            | 23.0      | 24.0      |     |           |  |  |  |
| Gecko International Co.                       |             |                                        |             |                                   |                                  | DATE      |                                                                                       |            | 2016-2-27 | DIMENSION |     | TOLERANCE |  |  |  |
| TITLE                                         | SNAP RIVETS |                                        |             |                                   |                                  | SCALE     |                                                                                       |            | FIT       | L≤4       |     | ±0.10     |  |  |  |
| ARTICLE NO.                                   | GR1         | MOLD NO.                               | /           | DRAW                              | PLK                              | UNIT      | MM                                                                                    | 4 < L≤15   |           | ±0.20     |     |           |  |  |  |
| PART NO.                                      | SEE TABLE   | MATERIAL                               | SEE TABLE   | DESIGN                            | PLK                              | VERSION   | A1                                                                                    | 15 < L≤50  |           | ±0.30     |     |           |  |  |  |
| DWG NO.                                       | E2000       | COLOR                                  | SEE TABLE   | APPROVAL                          | FDL                              | VIEW      |  | 50 < L≤100 |           | ±0.40     |     |           |  |  |  |