
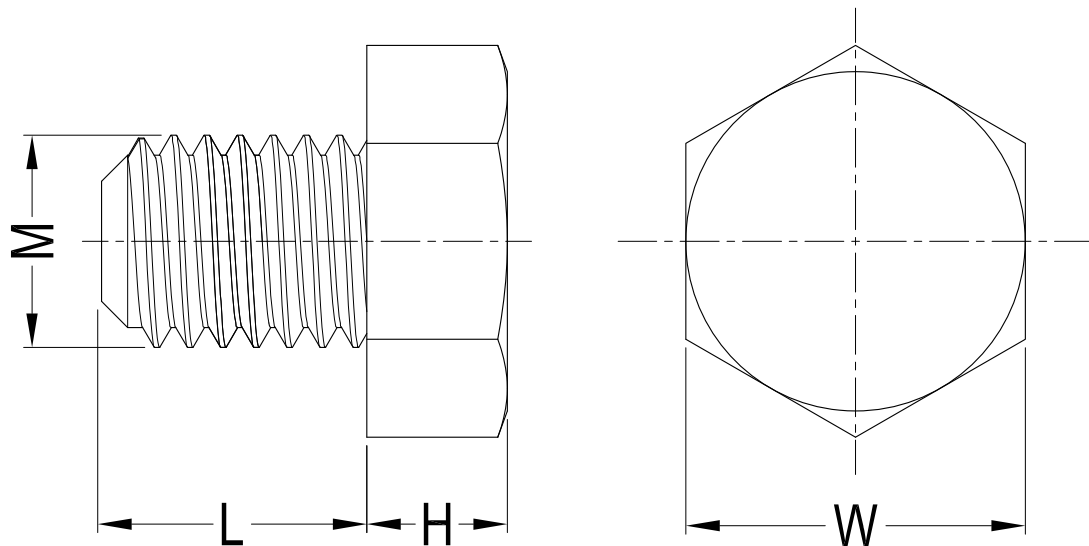




Notes:

1. Material: PA66 UL94 V2;
2. Color: Natural;
3. Male (M2) Torques: $\geq 0.06 \text{ N}\cdot\text{m}$;
Male (M2.5) Torques: $\geq 0.08 \text{ N}\cdot\text{m}$;
Male (M3) Torques: $\geq 0.13 \text{ N}\cdot\text{m}$;
Male (M4) Torques: $\geq 0.3 \text{ N}\cdot\text{m}$;
Male (M5) Torques: $\geq 0.58 \text{ N}\cdot\text{m}$;
Male (M6) Torques: $\geq 0.8 \text{ N}\cdot\text{m}$;
Male (M8) Torques: $\geq 2.5 \text{ N}\cdot\text{m}$;
4. RoHS Compliant;
5. The tolerance of "L" conform to the standard: DIN EN ISO 4017.

Part No. / Length	4.0	4.5	5.0	6.0	6.5	8.0	10.0	12.0	15.0	16.0	20.0	22.0	25.0	30.0	35.0	40.0	45.0	50.0	60.0	H	W
Article No.																					
GHHS-4017-M2-L	50586		50587	50588		50589	50590	50591		50592	50593		50594							1.4 $\pm$ 0.12	4.0 $^{+0}_{-0.18}$
GHHS-4017-M2.5-L	50595	50596	50597	50598		50599	50600	50601		50602	50603		50604							1.7 $\pm$ 0.12	5.0 $^{+0}_{-0.18}$
GHHS-4017-M3-L	50605		50606	50607		50608	50609	50610		50611	50612		50613	50614	50615	50616				2.0 $\pm$ 0.12	5.5 $^{+0}_{-0.18}$
GHHS-4017-M4-L	50617			50618		50619	50620	50621	50622	50623	50624		50625	50626		50627				2.8 $\pm$ 0.12	7.0 $^{+0}_{-0.22}$
GHHS-4017-M5-L				50458		50524	50525	50526		50527	50528		50529	50534		50535		50651		3.5 $\pm$ 0.15	8.0 $^{+0}_{-0.22}$
GHHS-4017-M6-L			50628	50629	50630	50631	50632	50633		50530	50531	50532	50533	50536		50537		50634	50635	4.0 $\pm$ 0.15	10.0 $^{+0}_{-0.22}$
GHHS-4017-M8-L						50714	50520	50521		50522	50434		50523	50636	50637	50638	50639	50640		5.3 $\pm$ 0.15	13.0 $^{+0}_{-0.27}$

Gecko International Co.						DATE	2025-10-15	DIMENSION	TOLERANCE
TITLE	HEXAGONAL HEAD SCREW ISO4017 / DIN933					SCALE	FIT	L $\leq$ 4	$\pm$ 0.10
ARTICLE NO.	GHHS-4017	MOLD NO.	S0269/S0506	DRAW	LWJ	UNIT	MM	4< L $\leq$ 15	$\pm$ 0.20
PART NO.	SEE TABLE	MATERIAL	SEE NOTES	DESIGN	LWJ	VERSION	A0	15< L $\leq$ 50	$\pm$ 0.30
DWG NO.	E5039	COLOR	SEE NOTES	APPROVAL	FDL	VIEW		50< L $\leq$ 100	$\pm$ 0.40