


REV	DESCRIPTION	DATE	CHECK
A1	Drawing layout update	2025-11-13	FDL

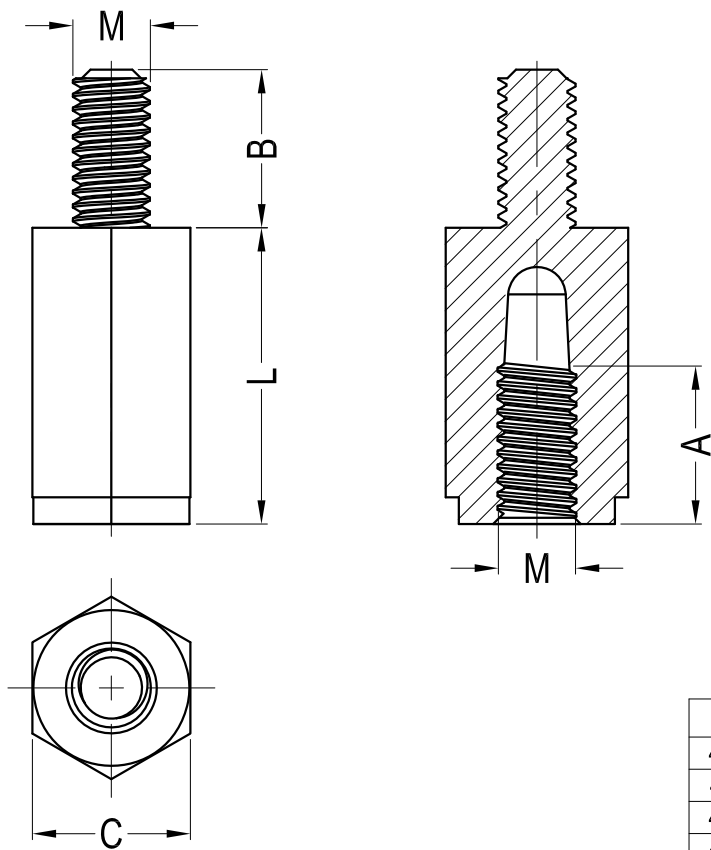

Notes:

1. Material: PA66 UL94 V2;
2. Female Torques: $\geq 0.17 \text{ N}\cdot\text{m}$;
3. Male Torques: $\geq 0.13 \text{ N}\cdot\text{m}$;
4. RoHS Compliant.

Part No.	Article No.	A	B	C	L	M
42905/43140	GHTS-M3-5.5-5B/N	4.0	8.0	5.5	5.0	M3
42906/43141	GHTS-M3-5.5-8B/N	6.0			8.0	
42907/43142	GHTS-M3-5.5-10B/N	8.0			10.0	
42908/43143	GHTS-M3-5.5-12B/N	10.0			12.0	
42909/43144	GHTS-M3-5.5-15B/N				15.0	
42910/43145	GHTS-M3-5.5-20B/N				20.0	
42911/43146	GHTS-M3-5.5-25B/N				25.0	
42912/43147	GHTS-M3-5.5-35B/N				35.0	
42913/43148	GHTS-M3-6-5B/N	4.0	8.0	5.0		
40715/41304	GHTS-M3-6-6B/N	6.0		6.0		
40716/41305	GHTS-M3-6-8B/N		6.3	8.0		
42106/41320	GHTS-M3-6-8-6.3B/N	8.0		8.0	10.0	
40696/41306	GHTS-M3-6-10B/N	10.0	12.0			
40796/42213	GHTS-M3-6-12B/N		13.0			
40788/42214	GHTS-M3-6-13B/N		15.0			
41342/42215	GHTS-M3-6-15B/N		16.0			
40789/42216	GHTS-M3-6-16B/N		17.0			
43580/43581	GHTS-M3-6-17B/N		18.0			
40787/42217	GHTS-M3-6-18B/N		20.0			
40718/41307	GHTS-M3-6-20B/N		22.0			
40719/41308	GHTS-M3-6-22B/N		25.0			
42914/43149	GHTS-M3-6-25B/N		27.0			
43213/43216	GHTS-M3-6-27B/N		30.0			
42200/41309	GHTS-M3-6-30B/N		35.0			
42915/43150	GHTS-M3-6-35B/N		40.0			
40714/42107	GHTS-M3-6-40B/N					
Color: Black/Natural						

Part No.	Article No.	A	B	C	L	M
42916/43151	GHTS-M3-8-8B/N	6.0	8.0	8.0	8.0	M3
42917/43152	GHTS-M3-8-10B/N	8.0			10.0	
42918/43153	GHTS-M3-8-20B/N	10.0			20.0	
42919/43154	GHTS-M3-8-35B/N				35.0	
Color: Black/Natural						

Gecko International Co.						DATE	2025-11-13	DIMENSION	TOLERANCE
TITLE	HEX MALE-FEMALE THREADED SPACER					SCALE	FIT	$L \leq 4$	± 0.10
ARTICLE NO.	GHTS-M3	MOLD NO.	/		DRAW	JF	UNIT	$4 < L \leq 15$	± 0.20
PART NO.	SEE TABLE	MATERIAL	SEE NOTES		DESIGN	JF	VERSION	$15 < L \leq 50$	± 0.30
DWG NO.	E4064	COLOR	SEE TABLE		APPROVAL	FDL	VIEW	$50 < L \leq 100$	± 0.40