


REV	DESCRIPTION	DATE	CHECK
A1	1.The mid part of plastic spacer changed from through hole to blind hole. 2.The Article No. changed from GRSP-HTS to GRSP-HTS2.	2025-12-25	FDL

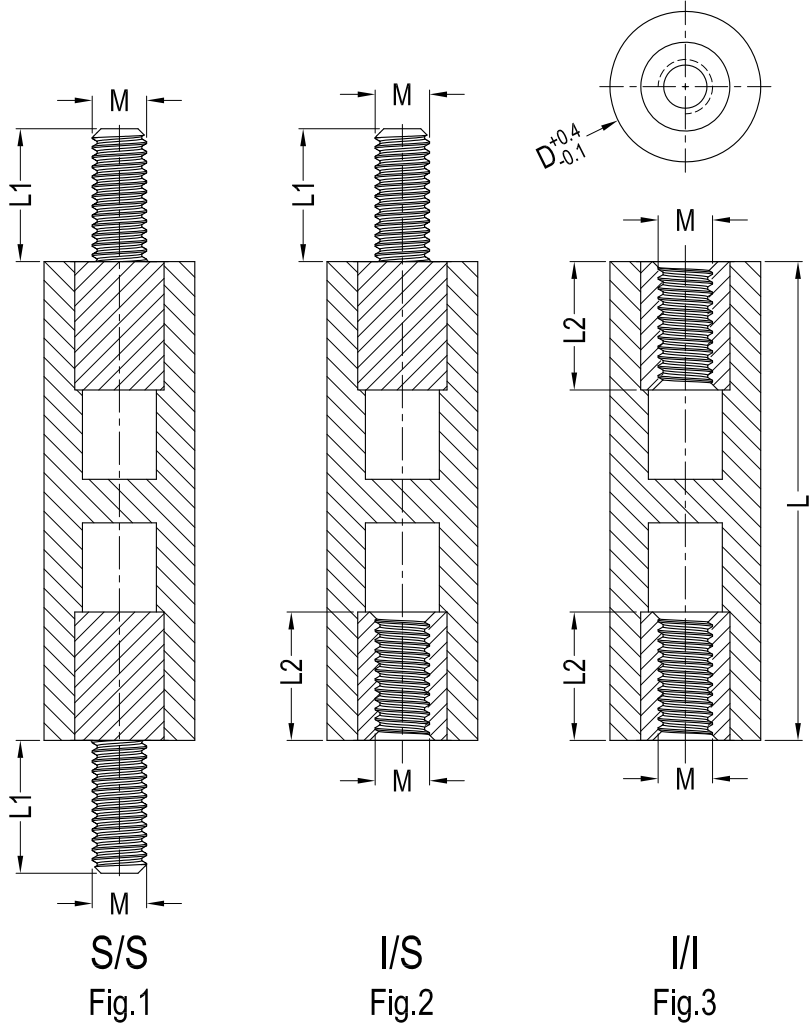

Part No.	Article No.	D	L	L1	L2	M	Withdraw Force	Holding Force	Torque	Fig.	
42304	GRSP-HTS2-M2-5.9-30-S1/S1	5.9	30.0	6.0	/	M2	≥120.0N	≥120.0N	≥4.0kgf.cm	1	
40600	GRSP-HTS2-M2-5.9-30-I1/S1			6.0						2	
42305	GRSP-HTS2-M2-5.9-30-I1/I1				/						3
43316	GRSP-HTS2-M3-6.5-10-I4/S2	6.5	10.0	4.5	4.0	M3	≥150.0N	≥150.0N	≥8.0kgf.cm	2	
40694	GRSP-HTS2-M3-6.5-10-I4/I4			/						3	
44078	GRSP-HTS2-M3-6.5-12-S1/S1		12.0	6.0	/					5.0	1
42306	GRSP-HTS2-M3-6.5-12-S2/S2			4.5							
44079	GRSP-HTS2-M3-6.5-12-I2/S1			6.0							3
42307	GRSP-HTS2-M3-6.5-12-I2/S2			4.5							
42220	GRSP-HTS2-M3-6.5-12-I2/I2			/							
44080	GRSP-HTS2-M3-6.5-13-S1/S1		13.0	6.0	/					5.0	1
42308	GRSP-HTS2-M3-6.5-13-S2/S2			4.5							
43324	GRSP-HTS2-M3-6.5-13-I2/S1			6.0							
42309	GRSP-HTS2-M3-6.5-13-I2/S2			4.5							
42221	GRSP-HTS2-M3-6.5-13-I2/I2			/							3
42310	GRSP-HTS2-M3-6.5-25-S1/S1		25.0	6.0	/						1
42311	GRSP-HTS2-M3-6.5-25-I1/S1			6.0						2	
42222	GRSP-HTS2-M3-6.5-25-I1/I1				/						3
41261	GRSP-HTS2-M4-8-25-S1/S1	8.0	25.0	6.0	/	M4	≥180.0N	≥180.0N	≥13.0kgf.cm	1	
41260	GRSP-HTS2-M4-8-25-I1/S1			6.0						2	
44046	GRSP-HTS2-M4-8-25-I3/S3			10.0	10.0						
41262	GRSP-HTS2-M4-8-25-I1/I1			/	6.0					3	
40666	GRSP-HTS2-M5-9.5-45-S1/S1	9.5	45.0	10.0	/	M5	≥250.0N	≥250.0N	≥20.0kgf.cm	1	
40664	GRSP-HTS2-M5-9.5-45-I1/S1			10.0						2	
40665	GRSP-HTS2-M5-9.5-45-I1/I1				/						3

Notes:
1. Material: PA66 UL94 V2 +Brass;
2. Color: Natural;
3. RoHS Compliant;

Gecko International Co.						DATE	2025-12-25	DIMENSION	TOLERANCE
TITLE	METRIC ROUND INSULATORS					SCALE	FIT	L≤4	±0.10
ARTICLE NO.	GRSP-HTS2-M	MOLD NO.	/	DRAW	LWJ	UNIT	MM	4< L≤15	±0.20
PART NO.	SEE TABLE	MATERIAL	SEE NOTES	DESIGN	LWJ	VERSION	A1	15< L≤50	±0.30
DWG NO.	E4274	COLOR	SEE NOTES	APPROVAL	FDL	VIEW		50< L≤100	±0.40