
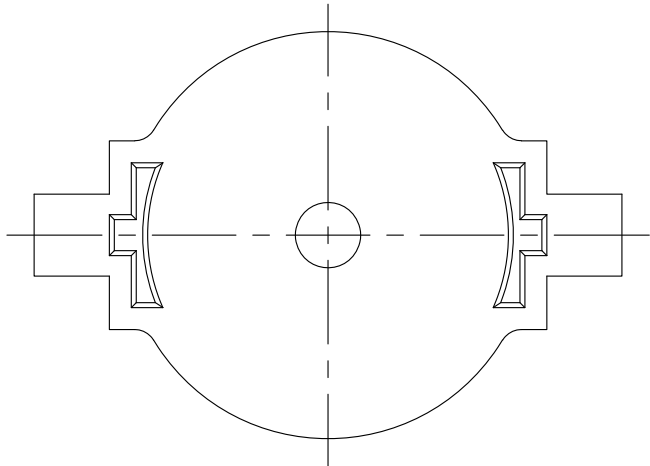
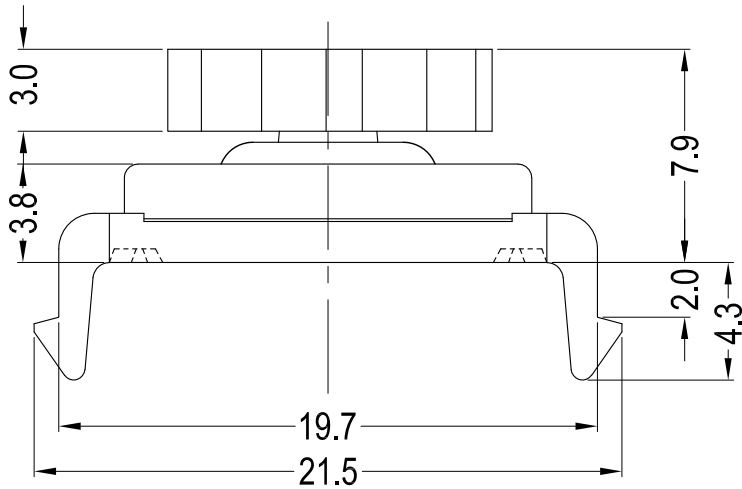


REV	DESCRIPTION	DATE	CHECK
A1	Add "G" to the original Article No. .	2025-10-16	FDL
A2	Modify the Torque tolerance;25±8 to 25±10; 60±10 to 60±15;120±15 to 120±20; 150±15 to 150±25;180±20 to 180±25.	2026-4-7	FDL

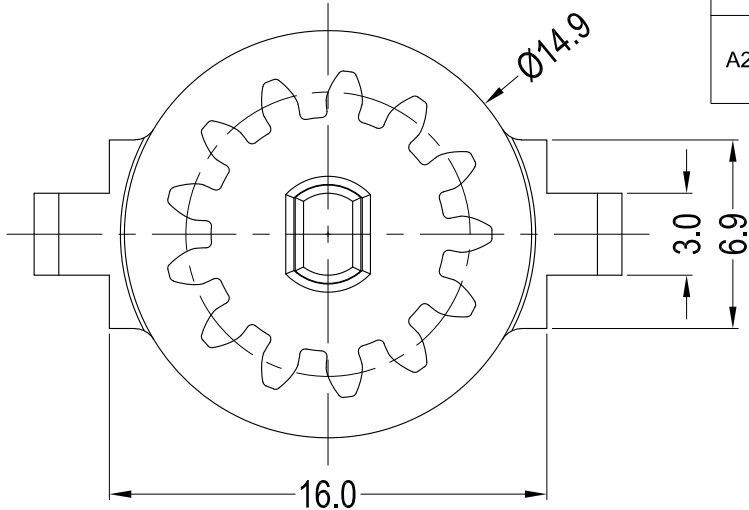

Type	Standard Spur
Teeth Profile	Involute Full Depth
Pressure Angle	20°
Number of Teeth	13
Module	0.8
Durability	30000 cycles

Part No.	Article No.	Torque (gf.cm) @20 RPM&23℃	Identification Paint Mark
30140	GDMP-A2-25	25±10	White
30141	GDMP-A2-40	40±10	Yellow
30142	GDMP-A2-60	60±15	Purple
30143	GDMP-A2-80	80±15	Green
30145	GDMP-A2-120	120±20	Black
30146	GDMP-A2-150	150±25	Red
30364	GDMP-A2-180	180±25	Blue

- Notes:
1. Material:
(Body and Cap) PC UL94 V2,
(Gear and Shaft) POM UL94 HB;
 2. Color: Black;
 3. RoHS Compliant.

Gecko International Co.						DATE	2026-4-7	DIMENSION	TOLERANCE
TITLE	ROTARY DAMPER WITH GEAR					SCALE	FIT	L≤4	±0.10
ARTICLE NO.	GDMP-A2	MOLD NO.	/	DRAW	LWJ	UNIT	MM	4< L≤15	±0.20
PART NO.	SEE TABLE	MATERIAL	SEE NOTES	DESIGN	LWJ	VERSION	A2	15< L≤50	±0.30
DWG NO.	E3042	COLOR	SEE NOTES	APPROVAL	FDL	VIEW		50< L≤100	±0.40