
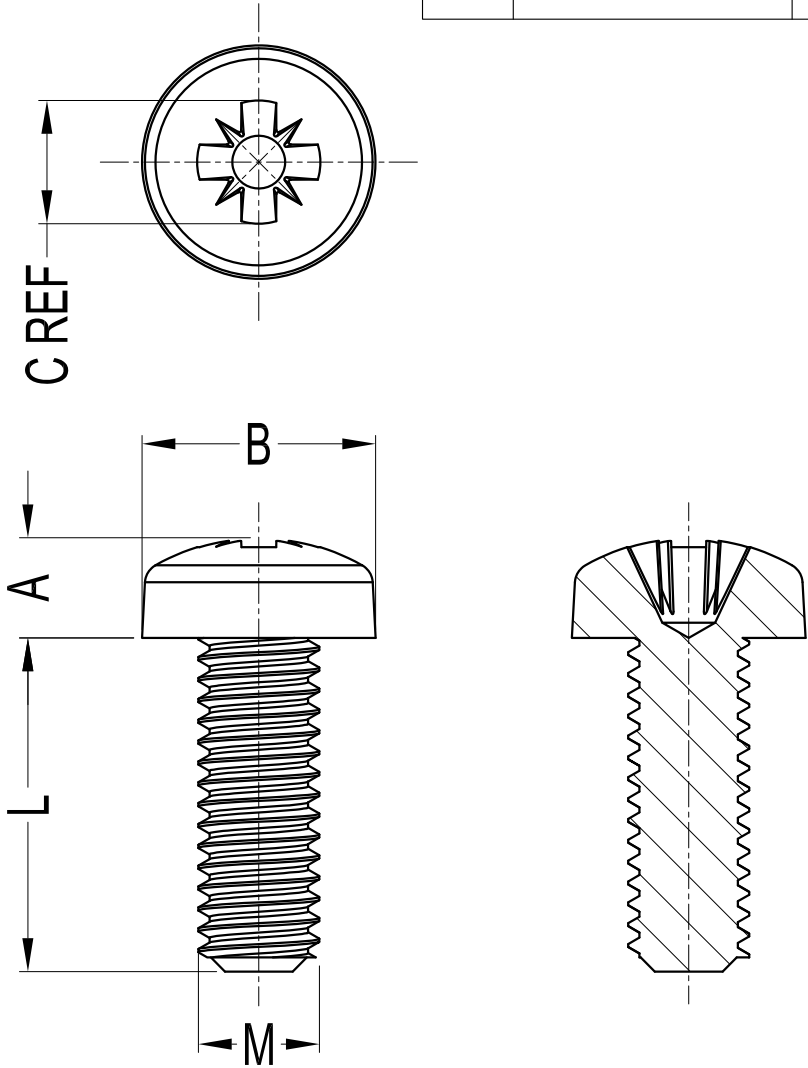


REV	DESCRIPTION	DATE	CHECK
A1	①3.45 Change to 3.7; ②4.2 Change to 4.6; ③Ø9.8 Change to Ø9.5.	2016-7-14	FDL



- Notes:
- 1. Material: PA66 UL94 V2;
 - 2. Color: Natural;
 - 3. Male (M3) Torques: $\cong 0.13\text{ N}\cdot\text{m}$;
Male (M4) Torques: $\cong 0.3\text{ N}\cdot\text{m}$;
Male (M5) Torques: $\cong 0.58\text{ N}\cdot\text{m}$;
Male (M6) Torques: $\cong 0.8\text{ N}\cdot\text{m}$;
Male (M8) Torques: $\cong 2.5\text{ N}\cdot\text{m}$;
 - 4. RoHS Compliant.

Part No. Article No.	Length																		A	B	C
	4.0	5.0	6.0	6.5	8.0	10.0	12.0	15.0	16.0	20.0	22.0	25.0	30.0	35.0	40.0	45.0	50.0	60.0			
GCHROHS-34812-M3-L	50088	50089	50090		50091	50092	50093		50094	50095		50096	50097	50098	50099				$2.4^{0}_{-0.14}$	$\varnothing 5.6^{0}_{-0.3}$	2.8
GCHROHS-34812-M4-L	50515		50127		50128	50129	50130	50556	50131	50132		50133	50134		50135				$3.1^{0}_{-0.18}$	$\varnothing 8.0^{0}_{-0.36}$	4.3
GCHROHS-34812-M5-L			50166		50167	50168	50169		50170	50171		50172	50173		50174		50175		① $3.7^{0}_{-0.18}$	③ $\varnothing 9.5^{0}_{-0.36}$	4.7
GCHROHS-34812-M6-L		50215	50216	50217	50218	50219	50220		50221	50222	50559	50223	50224		50225		50226	50227	② $4.6^{0}_{-0.3}$	$\varnothing 12.0^{0}_{-0.43}$	6.7
GCHROHS-34812-M8-L					50716	50641	50642		50643	50644		50645	50646	50647	50648	50649	50650		$6.0^{0}_{-0.3}$	$\varnothing 16.0^{0}_{-0.43}$	8.8

Gecko International Co.						DATE	2026-4-23	DIMENSION	TOLERANCE
TITLE	CROSSED RECESSED OVAL HEAD SCREW POZI ISO34812					SCALE	FIT	L≤4	±0.10
ARTICLE NO.	GCHROHS-34812	MOLD NO.	/	DRAW	LWJ	UNIT	MM	4< L≤15	±0.20
PART NO.	SEE TABLE	MATERIAL	SEE NOTES	DESIGN	LWJ	VERSION	A1	15< L≤50	±0.30
DWG NO.	E5010	COLOR	SEE NOTES	APPROVAL	FDL	VIEW		50< L≤100	±0.40